


## Capacitance Level Switch



### Flat Type Electrode For Powder

- Low level detection with powder load on.
- Electrode should not be intruded into the tank because of agitator.

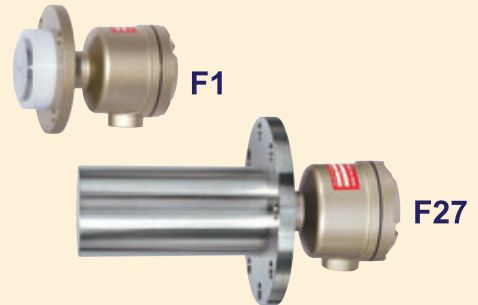

### Features of flat electrode


Electrodes are available based on the length of mounting nozzle and its diameter.

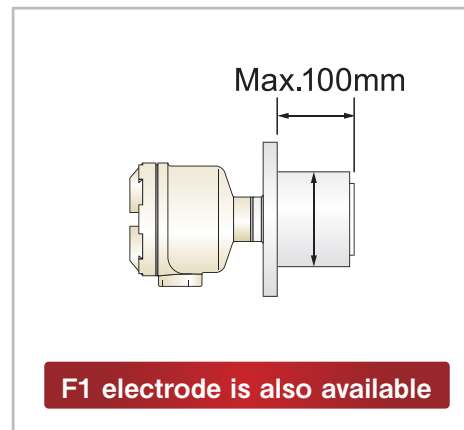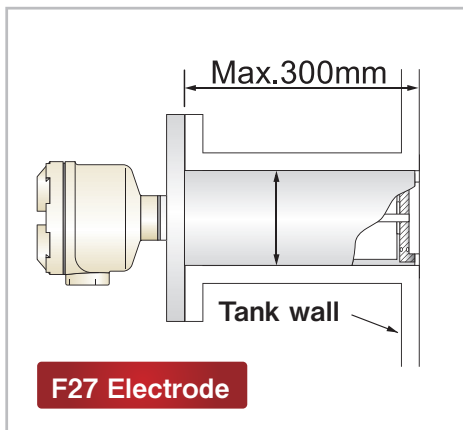

### Special specification

#### Ultra heat resistant Type


Recommended for the low level detection in ultra-high temperature application such as incinerator.

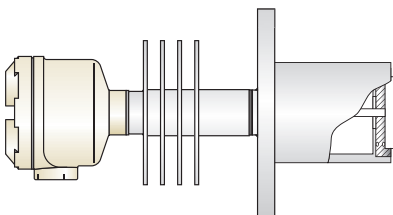

Built-in amp. model : Max.350℃  
Remote amp. model: Max.350℃

#### IDF Type

Recommended for food and medical application which requires frequent dismounting/mounting for electrode cleaning up.

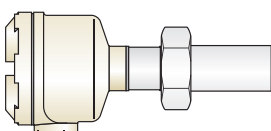

Union model  
IDF1S - 4S is available.  
※Ferule is not available.