

KSL SERIES


Sounding Level Meter

**Here we introduce special weights
for low bulk density materials!**

KSL-T2
Standard




Measuring powder with low bulk density




A standard weight will be covered by the powder without being detected.

Exchange it to the special weight for low bulk density materials !


By enlarging the contact area to the powder surface, the surface can be detected exactly.

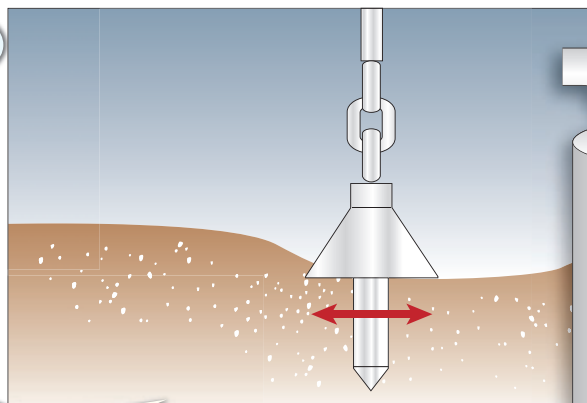


*We recommend special weight for low bulk density materials when the bulk density is ≤ 0.4 .

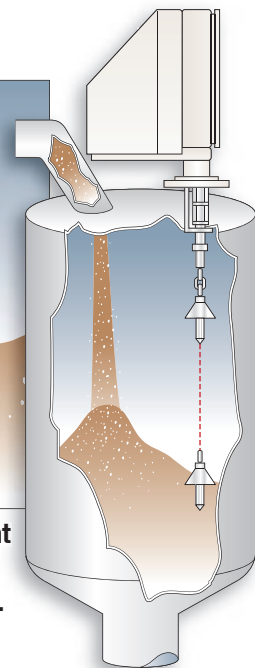


Varieties

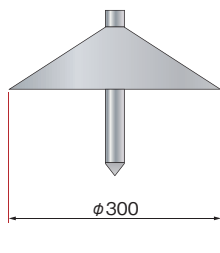


For KSL-T8, KSL-GT and KSL-T2

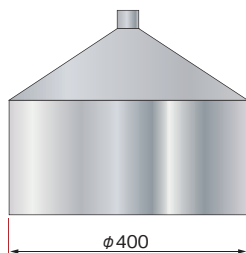

400



90



300

For KSL-MT, KSL-W2B and KSL-W3T