


Rotary Paddle Level Switch for low level detection Load Resistant Model



NL-15B series

Best level switch for low level detection in the big tank! Standard, Extensible protective tube, Protective cover and Heat resistant model. We have various models suitable to customer's application.




NL-15B (Standard)

Wetted part SUS possible.




NL-15BS (Extensible protective tube)

Protective tube is extensible according to customer's applications.

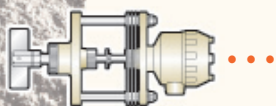

NL-15BH (Heat resistant)


Max. temp. 250°C in the tank is OK.

**NL-15BY (Protective cover)**

Protective cover avoids the direct load on the paddle or shaft.

We craft further custom made specification based on customer's application. For any inquiry, feel free to contact our sales!


NL-15B (Standard)

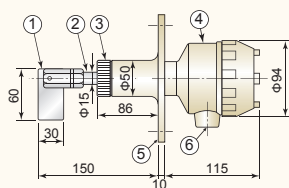

1	Paddle	304SS
2	Main Shaft	304SS
3	Sealcap	C3604
4	Housing	AC
5	Flange	AC
6	Conduit Connection	G 1/2


- Weight: about 2.2kg

NL-15BS (Protective Tube Extension Type)

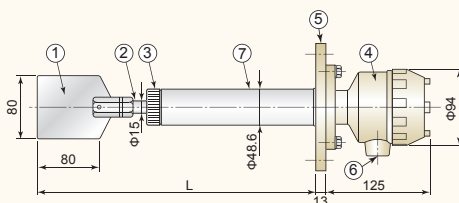


1	Paddle	304SS
2	Main Shaft	304SS
3	Sealcap	C3604
4	Housing	AC
5	Flange	SS400
6	Conduit Connection	G 1/2
7	Protective Tube	304SS

NL-15BH (Heat resistant)

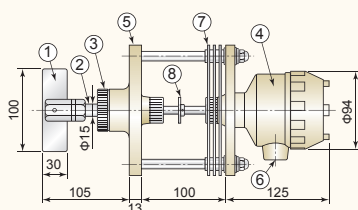

1	Paddle	304SS
2	Main Shaft	304SS
3	Sealcap	C3604
4	Housing	AC
5	Flange	SS400
6	Conduit Connection	G 1/2
7	Radiation Fin	ALP
8	Rotation Check Board	AC

NL-15BY (Protective cover)

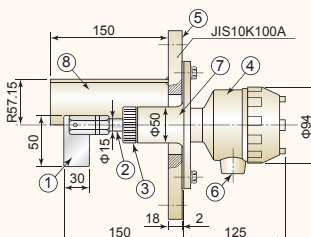

1	Paddle	304SS
2	Main Shaft	304SS
3	Sealcap	C3604
4	Housing	AC
5	Flange	SS400
6	Conduit Connection	G 1/2
7	Boss	AC
8	Protective Cover	SGP